Cartridge

243 Win - 85/90 grain

Version 9.0

NOSLER®

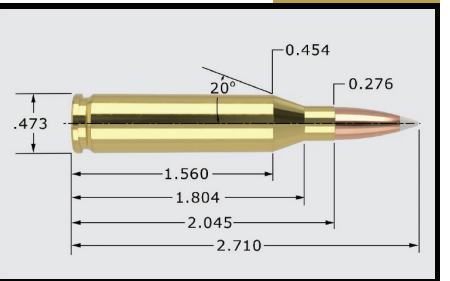

243 Win - 85/90 grain — 6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.710"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	PT	85gr. Spitzer	2.680"	0.315	0.206
AccuBond®	AB	90gr. Spitzer	2.680"	0.376	0.218
Ballistic Tip®	BT	90gr. Spitzer	2.680"	0.365	0.218
Expansion Tip®	ET	90gr. Spitzer	2.680"	0.403	0.218

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	52.8 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.			MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	37.0		MAX.	3083	76%
	35.0	*		2890	72%
	33.0			2697	68%
Hunter	44.5		MAX.	3109	87%
	42.5	*		3012	83%
	40.5			2915	79%
Norma 204	43.0	*	MAX.	3112	90%
	41.0			2991	86%
	39.0			2870	82%
IMR 4451	41.0	*	MAX.	3133	83%
	39.0			2962	79%
	37.0			2791	75%
H414	41.0	*	MAX.	3146	81%
	39.0			3048	77%
	37.0			2950	73%
H4831SC	46.0	*	MAX.	3149	91%
	44.0			3017	87%
	42.0			2885	83%
RL17	41.0	*	MAX.	3184	80%
	39.0			3016	76%
	37.0			2848	73%
RL15	38.0		MAX.	3199	75%
	36.0	*		2972	71%
	34.0			2745	67%
IMR 4350	42.5		MAX.	3224	86%
	40.5			3203	82%
	38.5	*		3182	78%
IMR 4831	43.5	*	MAX.	3252	88%
Most Accurate	41.5			3192	84%
Powder Tested	39.5			3132	80%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

" Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load