


Cartridge

243 Win - 95/100 grain

Version 9.0

NOSLER®

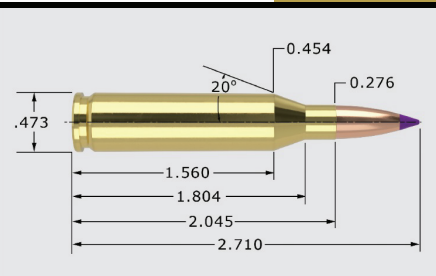

243 Win - 95/100 grain

6mm (.243")

MAXIMUM SAAMI O.A.C.L.		2.710"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	95gr. Spitzer	2.680"	0.379	0.230
CT® Ballistic Silvertip®	BST	95gr. Spitzer	2.680"	0.379	0.230
Partition®	PT	95gr. Spitzer	2.680"	0.365	0.230
Partition®	PT	100gr. Spitzer	2.680"	0.384	0.242
CASE TYPE:	Nosler		PRIMER TYPE	Rem 9 1/2	
CASE HOLDS:	50.0	Gr. WATER	BARREL Length/Make	24" Lilja	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H414	40.0 * MAX.	2988	83%		
	38.0	2839	79%		
	36.0	2690	75%		
Norma 204	42.0 * MAX.	3011	93%		
	40.0	2863	89%		
	38.0	2715	84%		
RL17 Most Accurate Powder Tested	40.0 * MAX.	3033	83%		
	38.0	2864	79%		
	36.0	2695	75%		
H4831SC	44.0 MAX.	3063	92%		
	42.0 *	2940	88%		
	40.0	2817	83%		
RL19	44.0 MAX.	3065	96%		
	42.0 *	2939	91%		
	40.0	2813	87%		
IMR 7977	46.0 * MAX.	3080	99%		
	44.0	2938	95%		
	42.0	2796	90%		
H1000	47.0 * MAX.	3093	99%		
	45.0	2959	95%		
	43.0	2825	91%		
Norma MRP	45.0 MAX.	3103	99%		
	43.0 *	2951	95%		
	41.0	2799	90%		
RL25	47.0 MAX.	3116	** 102%		
	45.0 *	2988	98%		
	43.0	2860	93%		
Magnum	50.0 MAX.	3161	** 102%		
	48.0 *	3038	97%		
	46.0	2915	93%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
 ** = Compressed load