


Cartridge

25-06 Rem - 100 grain

Version 9.0

NOSLER®

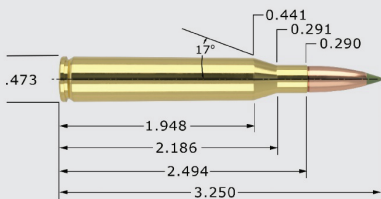

25-06 Rem - 100 grain

25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.		3.250"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	100gr. Spitzer	3.200"	0.393	0.216
Expansion Tip®	ET	100gr. Spitzer	3.170"	0.409	0.216
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	100gr. Spitzer	3.200"	0.377	0.216

CASE TYPE:	Nosler		PRIMER TYPE	WLR	
CASE HOLDS:	64.2	Gr. WATER	BARREL Length/Make	24" Wiseman	
			BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	42.0 * MAX.	3118		71%
		2983		68%
		2848		64%
IMR 4064	41.5 MAX.	3142		71%
		2987		68%
	37.5 *	2832		65%
IMR 7828	56.5 MAX.	3252		94%
		3127		90%
	52.5 *	3002		87%
Magnum	62.0 MAX.	3265		98%
	60.0 *	3172		95%
		3079		92%
IMR 4831	53.5 MAX.	3290		89%
		3194		86%
	49.5 *	3099		82%
H4350	53.5 MAX.	3318		88%
		3143		85%
	49.5 *	2968		82%
N160	54.0 MAX.	3343		93%
		3234		90%
	50.0 *	3125		87%
IMR 4350	51.0 * MAX.	3352		85%
		3247		82%
		3142		78%
RL19	54.5 MAX.	3361		92%
Most Accurate Powder Tested	52.5 *	3254		89%
	50.5	3147		86%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load