


Cartridge

25-06 Rem - 110 grain

Version 9.0

NOSLER®

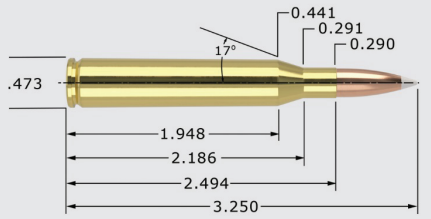

25-06 Rem - 110 grain

25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.	3.250"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 110gr. Spitzer	3.200"	0.418	0.238

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	63.3 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
W760	46.5 MAX.	3083	77%
	44.5 *	2986	74%
	42.5	2889	70%
H4831SC	51.0 * MAX.	3115	84%
	49.0	3025	81%
	47.0	2934	77%
IMR 4831 Most Accurate Powder Tested	51.0 MAX.	3175	86%
	49.0	3085	83%
	47.0 *	2994	79%
IMR 4350	49.5 MAX.	3191	84%
	47.5 *	3077	80%
	45.5	2963	77%
Magnum	61.0 MAX.	3199	98%
	59.0	3090	95%
	57.0 *	2982	91%
RL19	52.0 MAX.	3207	89%
	50.0	3122	86%
	48.0 *	3038	82%
MAGPRO	56.0 MAX.	3214	91%
	54.0	3125	88%
	52.0 *	3037	85%
N560	52.5 MAX.	3217	92%
	50.5 *	3122	89%
	48.5	3027	85%
Returnbo	59.0 * MAX.	3271	100%
	57.0	3198	97%
	55.0	3125	93%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load