


Cartridge

25-06 Rem - 115 grain

Version 9.0

NOSLER®

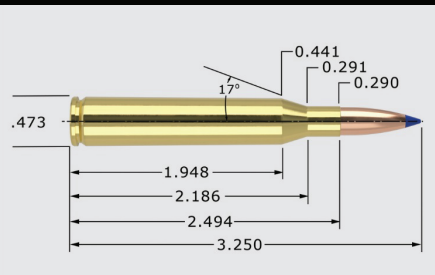

25-06 Rem - 115 grain

25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.		3.250"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	115gr. Spitzer	3.200"	0.453	0.249
CT® Ballistic Silvertip®	BST	115gr. Spitzer	3.200"	0.453	0.249
Partition®	PT	115gr. Spitzer	3.200"	0.389	0.249

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	63.3 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4064	40.0 MAX.	2871	70%
	38.0	2744	66%
	36.0 *	2617	63%
RL19	50.0 MAX.	3007	86%
	48.0	2909	82%
	46.0 *	2810	79%
IMR 7828	54.0 MAX.	3030	91%
	52.0	2880	87%
	50.0 *	2730	84%
N560	49.5 MAX.	3045	87%
	47.5 *	2977	83%
	45.5	2910	80%
N165	50.5 MAX.	3070	89%
	48.5	2970	85%
	46.5 *	2869	82%
IMR 4350	49.0 * MAX.	3095	83%
	Most Accurate	2986	79%
	Powder Tested	2877	76%
IMR 4831	52.0 * MAX.	3116	88%
	50.0	3024	84%
	48.0	2933	81%
Magnum	60.5 MAX.	3148	97%
	58.5	3037	94%
	56.5 *	2925	91%
Retumbo	57.5 MAX.	3167	98%
	55.5	3088	94%
	53.5 *	3009	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load