


Cartridge

25-06 Rem - 120 grain

Version 9.0

NOSLER®

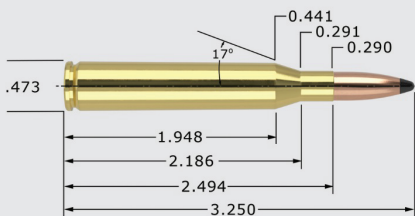

25-06 Rem - 120 grain

25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.			3.250"	TESTED O.A.C.L.	B.C.	S.D.
Partition®			PT	120gr. Spitzer	3.200"	0.391 0.260
CASE TYPE:	Nosler		PRIMER TYPE	WLR		
CASE HOLDS:	63.5	Gr. WATER	BARREL Length/Make	24" Wiseman		
			BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4064	40.0	MAX.	2870	70%		
	38.0		2740	66%		
	36.0 *		2610	63%		
IMR 4320	41.0 *	MAX.	2888	70%		
	39.0		2773	67%		
	37.0		2658	63%		
RL19	50.0	MAX.	2990	86%		
	48.0		2890	82%		
	46.0 *		2790	79%		
N165	50.5	MAX.	3007	88%		
	48.5		2907	85%		
	46.5 *		2807	81%		
IMR 7828	54.0	MAX.	3030	90%		
	52.0		2880	87%		
	50.0 *		2730	84%		
IMR 4831	50.0 *	MAX.	3046	84%		
	48.0		2897	81%		
	46.0		2748	77%		
IMR 4350	49.0 *	MAX.	3080	83%		
	47.0		2970	79%		
	45.0		2860	76%		
Magnum	60.0	MAX.	3099	96%		
	58.0 *		3006	93%		
	56.0		2913	90%		
Retumbo	57.5	MAX.	3177	97%		
Most Accurate	55.5		3108	94%		
Powder Tested	53.5 *		3040	91%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load