


Cartridge

25-06 Rem - 85 grain

Version 9.0

NOSLER®

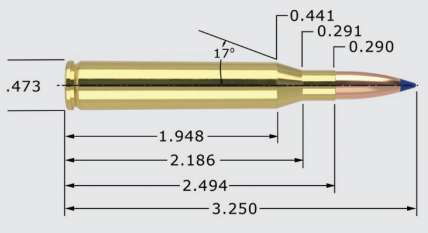

25-06 Rem - 85 grain

25 Cal. (.257")

| MAXIMUM SAAMI O.A.C.L. | | | 3.250" | TESTED O.A.C.L. | B.C. | S.D. |
|-----------------------------|------------------|-----------|---------------------------------|-----------------------|-------|-------------|
| Ballistic Tip® Varmint | | | BTV 85gr. Spitzer | 3.200" | 0.329 | 0.183 |
| CASE TYPE: | Nosler | | PRIMER TYPE | | | WLR |
| CASE HOLDS: | 65.8 | Gr. WATER | BARREL Length/Make | | | 24" Wiseman |
| | | | BARREL Twist | | | 1-10" |
| POWDER TYPE | POWDER CHG. GRS. | | MUZZLE VEL. F.P.S. | LOAD DENSITY (VOLUME) | | |
| H4831SC | 55.5 | MAX. 3408 | <div style="width: 88%;"></div> | 88% | | |
| | 53.5 | 3332 | <div style="width: 85%;"></div> | 85% | | |
| | 51.5 * | 3257 | <div style="width: 82%;"></div> | 82% | | |
| IMR 4064 | 47.0 | MAX. 3410 | <div style="width: 79%;"></div> | 79% | | |
| | 45.0 | 3315 | <div style="width: 76%;"></div> | 76% | | |
| | 43.0 * | 3220 | <div style="width: 72%;"></div> | 72% | | |
| IMR 4895 | 46.0 | MAX. 3450 | <div style="width: 76%;"></div> | 76% | | |
| | 44.0 | 3305 | <div style="width: 73%;"></div> | 73% | | |
| | 42.0 * | 3160 | <div style="width: 69%;"></div> | 69% | | |
| IMR 4350 | 53.5 | MAX. 3450 | <div style="width: 87%;"></div> | 87% | | |
| | 51.5 | 3313 | <div style="width: 84%;"></div> | 84% | | |
| | 49.5 * | 3175 | <div style="width: 80%;"></div> | 80% | | |
| Varget | 47.0 | MAX. 3537 | <div style="width: 77%;"></div> | 77% | | |
| | 45.0 | 3410 | <div style="width: 74%;"></div> | 74% | | |
| | 43.0 * | 3284 | <div style="width: 71%;"></div> | 71% | | |
| RL15 | 48.0 * | MAX. 3545 | <div style="width: 76%;"></div> | 76% | | |
| | 46.0 | 3426 | <div style="width: 73%;"></div> | 73% | | |
| | 44.0 | 3306 | <div style="width: 70%;"></div> | 70% | | |
| Big Game | 51.5 | MAX. 3562 | <div style="width: 80%;"></div> | 80% | | |
| | 49.5 | 3462 | <div style="width: 77%;"></div> | 77% | | |
| | 47.5 * | 3363 | <div style="width: 74%;"></div> | 74% | | |
| N160 | 57.0 | MAX. 3581 | <div style="width: 96%;"></div> | 96% | | |
| | 55.0 | 3475 | <div style="width: 93%;"></div> | 93% | | |
| | 53.0 * | 3369 | <div style="width: 89%;"></div> | 89% | | |
| RL19 | 57.0 * | MAX. 3600 | <div style="width: 94%;"></div> | 94% | | |
| Most Accurate Powder Tested | 55.0 | 3480 | <div style="width: 91%;"></div> | 91% | | |
| | 53.0 | 3360 | <div style="width: 88%;"></div> | 88% | | |

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load