


# Cartridge

250 Sav - 100 grain

Version 9.0

# NOSLER®

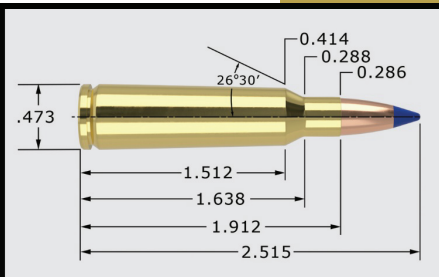

250 Sav - 100 grain

25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.		2.515"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	<b>BT</b>	100gr. Spitzer	2.515"	0.393	0.216
Expansion Tip®	<b>ET</b>	100gr. Spitzer	2.515"	0.409	0.216
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	100gr. Spitzer	2.515"	0.377	0.216
CASE TYPE:	Winchester	PRIMER TYPE	CCI BR-2		
CASE HOLDS:	41.2 Gr. WATER	BARREL Length/Make	22" Hart		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>IMR 4350</b>	38.0 * MAX.	2700	99%		
	36.0	2540	93%		
	34.0	2380	88%		
<b>AA 2520</b>	34.0 MAX.	2778	85%		
	32.0	2643	80%		
	30.0 *	2508	75%		
<b>N150</b> Most Accurate Powder Tested	34.5 MAX.	2787	99%		
	32.5 *	2653	93%		
	30.5	2520	87%		
<b>IMR 4320</b>	35.0 MAX.	2788	92%		
	33.0	2663	87%		
	31.0 *	2538	82%		
<b>RL19</b>	41.0 MAX.	2801	**	108%	
	39.0	2650	**	103%	
	37.0 *	2500	98%		
<b>H380</b>	38.5 * MAX.	2802	98%		
	36.5	2675	93%		
	34.5	2547	88%		
<b>Varget</b>	34.0 MAX.	2810	89%		
	32.0 *	2669	84%		
	30.0	2527	79%		
<b>W760</b>	38.0 MAX.	2830	97%		
	36.0	2690	91%		
	34.0 *	2550	86%		
<b>Hunter</b>	43.5 MAX.	2930	**	109%	
	41.5	2796	**	104%	
	39.5 *	2662	99%		
<b>H4895</b>	35.0 * MAX.	2952	93%		
	33.0	2837	88%		
	31.0	2722	83%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load