


Cartridge

250 Sav - 110 grain

Version 9.0

NOSLER[®]

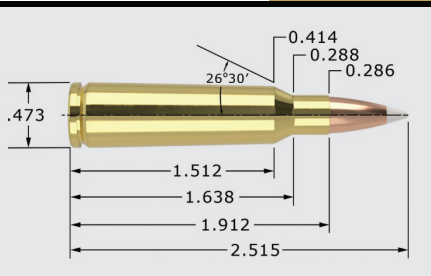

250 Sav - 110 grain

25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.		2.515"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond [®]		AB	110gr. Spitzer	2.515"	0.418	0.238
CASE TYPE:	Winchester	PRIMER TYPE		CCI BR-2		
CASE HOLDS:	40.3 Gr. WATER	BARREL Length/Make		22" Hart		
		BARREL Twist		1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
IMR 3031	30.0 * MAX.	2595	83%			
	28.0	2439	77%			
	26.0	2284	72%			
IMR 4350	37.5 MAX.	2604	100%			
	35.5 *	2474	94%			
	33.5	2344	89%			
IMR 4064	32.0 MAX.	2620	88%			
	30.0 *	2480	82%			
	28.0	2340	77%			
Varget	32.5 MAX.	2633	87%			
Most Accurate	30.5 *	2512	82%			
Powder Tested	28.5	2391	76%			
IMR 4895	33.0 MAX.	2641	89%			
	31.0 *	2504	84%			
	29.0	2368	78%			
RL19	39.5 MAX.	2643	**	107%		
	37.5 *	2492	**	101%		
	35.5	2342	96%			
H414	36.5 MAX.	2688	94%			
	34.5 *	2553	89%			
	32.5	2418	84%			
Big Game	37.5 MAX.	2734	95%			
	35.5	2598	90%			
	33.5 *	2461	85%			
Hunter	42.0 MAX.	2802	**	107%		
	40.0 *	2670	**	102%		
	38.0	2539	97%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load