


Cartridge

250 Sav - 115 grain

Version 9.0

NOSLER®

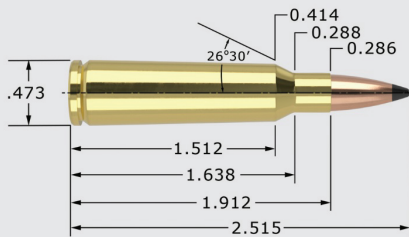

250 Sav - 115 grain

25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.		2.515"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	115gr. Spitzer	2.515"	0.453	0.249
CT® Ballistic Silvertip®	BST	115gr. Spitzer	2.515"	0.453	0.249
Partition®	PT	115gr. Spitzer	2.515"	0.389	0.249

CASE TYPE:	Winchester	PRIMER TYPE	CCI BR-2
CASE HOLDS:	40.2 Gr. WATER	BARREL Length/Make	22" Hart
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 3031	30.0 MAX.	2484	83%
	28.0	2321	77%
	26.0 *	2157	72%
IMR 4064	32.0 MAX.	2509	88%
	30.0	2360	82%
	28.0 *	2211	77%
IMR 4895	31.0 * MAX.	2510	84%
	29.0	2365	78%
	27.0	2220	73%
IMR 4350	36.0 * MAX.	2548	96%
	34.0	2376	90%
	32.0	2204	85%
RL19	38.5 MAX.	2550	** 104%
	36.5	2423	99%
	34.5 *	2297	93%
IMR 4320 Most Accurate Powder Tested	33.0 MAX.	2584	89%
	31.0	2444	84%
	29.0 *	2304	78%
H414	36.0 MAX.	2610	93%
	34.0 *	2475	88%
	32.0	2340	83%
W760	37.0 * MAX.	2627	96%
	35.0	2496	91%
	33.0	2365	86%
Hunter	39.5 MAX.	2648	** 101%
	37.5	2532	96%
	35.5 *	2416	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load