


# Cartridge

## 250 Sav - 120 grain

Version 9.0

# NOSLER®

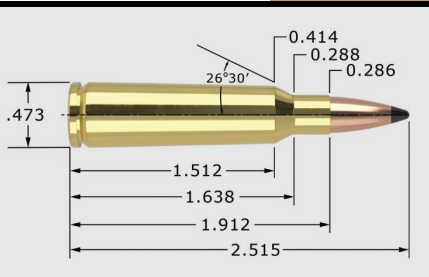

## 250 Sav - 120 grain

## 25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.			2.515"	TESTED O.A.C.L.	B.C.	S.D.
Partition®			PT	120gr. Spitzer	2.515"	0.391 0.260
CASE TYPE:	Winchester		PRIMER TYPE			CCI BR-2
CASE HOLDS:	40.1	Gr. WATER	BARREL Length/Make			22" Hart
			BARREL Twist			1-10"
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>IMR 3031</b>	30.0	MAX. 2428	<div style="width: 83%;"></div>	83%		
	28.0	2283	<div style="width: 78%;"></div>	78%		
	26.0 *	2138	<div style="width: 72%;"></div>	72%		
<b>IMR 4895</b>	31.0 *	MAX. 2480	<div style="width: 84%;"></div>	84%		
	29.0	2340	<div style="width: 79%;"></div>	79%		
	27.0	2200	<div style="width: 73%;"></div>	73%		
<b>IMR 4350</b> Most Accurate Powder Tested	36.0	MAX. 2510	<div style="width: 96%;"></div>	96%		
	34.0	2340	<div style="width: 91%;"></div>	91%		
	32.0 *	2170	<div style="width: 85%;"></div>	85%		
<b>RL19</b>	38.0	MAX. 2518	<div style="width: 103%;"></div>	** 103%		
	36.0	2397	<div style="width: 98%;"></div>	98%		
	34.0 *	2277	<div style="width: 92%;"></div>	92%		
<b>Varget</b>	31.0 *	MAX. 2518	<div style="width: 84%;"></div>	84%		
	29.0	2408	<div style="width: 78%;"></div>	78%		
	27.0	2298	<div style="width: 73%;"></div>	73%		
<b>IMR 4320</b>	33.0	MAX. 2578	<div style="width: 89%;"></div>	89%		
	31.0	2423	<div style="width: 84%;"></div>	84%		
	29.0 *	2268	<div style="width: 79%;"></div>	79%		
<b>Hunter</b>	39.0	MAX. 2619	<div style="width: 100%;"></div>	** 100%		
	37.0	2497	<div style="width: 95%;"></div>	95%		
	35.0 *	2376	<div style="width: 90%;"></div>	90%		
<b>H414</b>	37.5 *	MAX. 2620	<div style="width: 97%;"></div>	97%		
	35.5	2480	<div style="width: 92%;"></div>	92%		
	33.5	2340	<div style="width: 87%;"></div>	87%		
<b>H4831</b>	41.5	MAX. 2792	<div style="width: 108%;"></div>	** 108%		
	39.5	2667	<div style="width: 103%;"></div>	** 103%		
	37.5 *	2542	<div style="width: 97%;"></div>	97%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load