


Cartridge

250 Sav - 85 grain

Version 9.0

NOSLER®

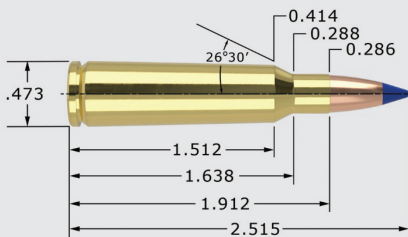

250 Sav - 85 grain

25 Cal. (.257")

| MAXIMUM SAAMI O.A.C.L. | | 2.515" | TESTED O.A.C.L. | B.C. | S.D. | |
|------------------------|------------------|------------|--------------------|----------|-----------------------|-------|
| Ballistic Tip® Varmint | | BTV | 85gr. Spitzer | 2.515" | 0.329 | 0.183 |
| CASE TYPE: | Winchester | | PRIMER TYPE | CCI BR-2 | | |
| CASE HOLDS: | 42.7 | Gr. WATER | BARREL Length/Make | 22" Hart | | |
| | | | BARREL Twist | 1-10" | | |
| POWDER TYPE | POWDER CHG. GRS. | | MUZZLE VEL. F.P.S. | | LOAD DENSITY (VOLUME) | |
| W760 | 39.0 * MAX. | 2900 | | | 96% | |
| | 37.0 | 2790 | | | 91% | |
| | 35.0 | 2680 | | | 86% | |
| W748 | 36.0 * MAX. | 2932 | | | 88% | |
| | 34.0 | 2797 | | | 83% | |
| | 32.0 | 2662 | | | 78% | |
| AA 2520 | 35.0 MAX. | 2980 | | | 85% | |
| | 33.0 | 2840 | | | 80% | |
| | 31.0 * | 2700 | | | 75% | |
| H414 | 41.0 * MAX. | 3000 | | | 100% | |
| | 39.0 | 2860 | | | 95% | |
| | 37.0 | 2720 | | | 90% | |
| H380 | 41.0 * MAX. | 3002 | | ** | 101% | |
| | 39.0 | 2867 | | | 96% | |
| | 37.0 | 2732 | | | 91% | |
| IMR 4895 | 35.0 MAX. | 3018 | | | 89% | |
| | 33.0 | 2853 | | | 84% | |
| | 31.0 * | 2688 | | | 79% | |
| RL15 | 36.0 MAX. | 3026 | | | 88% | |
| | 34.0 * | 2856 | | | 83% | |
| | 32.0 | 2686 | | | 78% | |
| Varget | 36.0 MAX. | 3047 | | | 91% | |
| | Most Accurate | 34.0 | 2879 | | 86% | |
| | Powder Tested | 32.0 * | 2711 | | 81% | |
| N150 | 36.5 * MAX. | 3060 | | ** | 101% | |
| | 34.5 | 2903 | | | 95% | |
| | 32.5 | 2745 | | | 90% | |
| Big Game | 40.0 MAX. | 3091 | | | 96% | |
| | 38.0 | 2947 | | | 91% | |
| | 36.0 * | 2804 | | | 86% | |

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load