


Cartridge

257 Ack Imp - 100 grain

Version 9.0

NOSLER®

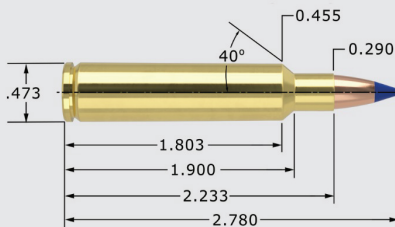

257 Ack Imp - 100 grain

25 Cal. (.257")

MAXIMUM O.A.C.L.		2.780"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	100gr. Spitzer	2.780"	0.393	0.216
Expansion Tip®	EI	100gr. Spitzer	2.780"	0.409	0.216
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	100gr. Spitzer	2.780"	0.377	0.216
CASE TYPE:	Nosler	PRIMER TYPE	Fed 210		
CASE HOLDS:	56.6 Gr. WATER	BARREL Length/Make	24" Wiseman		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
H380	45.5 * MAX.	3028		85%	
		2913		81%	
		2798		77%	
RL19	49.5 * MAX.	3088		95%	
		2953		91%	
		2818		87%	
RL15	43.0 * MAX.	3132		79%	
		3007		75%	
		2882		72%	
W760	47.0 MAX.	3134		87%	
	45.0 *	3022		83%	
		2911		80%	
H4831SC	53.5 MAX.	3169		98%	
	51.5 *	3087		95%	
		3005		91%	
N160	50.0 * MAX.	3173		98%	
		3064		94%	
		2955		90%	
IMR 4350	50.0 * MAX.	3208		94%	
	Most Accurate	48.0	3093	91%	
	Powder Tested	46.0	2978	87%	
IMR 4895	44.5 * MAX.	3222		86%	
		3067		82%	
		2912		78%	
Hunter	50.5 MAX.	3234		92%	
		3134		88%	
	46.5 *	3033		85%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load