


Cartridge

257 Ack Imp - 115 grain

Version 9.0

NOSLER®

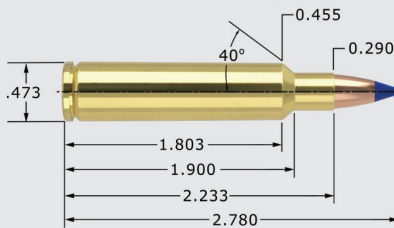

257 Ack Imp - 115 grain

25 Cal. (.257")

MAXIMUM O.A.C.L.		2.780"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	115gr. Spitzer	2.780"	0.453	0.249
CT® Ballistic Silvertip®	BST	115gr. Spitzer	2.780"	0.453	0.249
Partition®	PT	115gr. Spitzer	2.780"	0.389	0.249
CASE TYPE:	Nosler		PRIMER TYPE	Fed 210	
CASE HOLDS:	56.0	Gr. WATER	BARREL Length/Make	24" Wiseman	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
AA 4350	44.5 * MAX.	2835	89%		
	42.5	2694	85%		
	40.5	2552	81%		
IMR 4831	45.5 * MAX.	2869	87%		
	43.5	2724	83%		
	41.5	2579	79%		
IMR 4350	45.5 * MAX.	2931	87%		
	43.5	2792	83%		
	41.5	2654	79%		
RL15	41.0 MAX.	2950	76%		
	39.0	2833	73%		
	37.0 *	2715	69%		
RL19 Most Accurate Powder Tested	47.5 MAX.	2960	92%		
	45.5	2816	88%		
	43.5 *	2672	84%		
N160	47.5 MAX.	2963	94%		
	45.5	2851	90%		
	43.5 *	2739	86%		
Hunter	47.5 MAX.	2966	87%		
	45.5	2892	84%		
	43.5 *	2818	80%		
W760	45.0 MAX.	3005	84%		
	43.0	2867	80%		
	41.0 *	2730	77%		
H4831SC	50.5 MAX.	3012	94%		
	48.5	2895	90%		
	46.5 *	2778	86%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load