


Cartridge

257 Rob +P - 110 grain

Version 9.0

NOSLER®

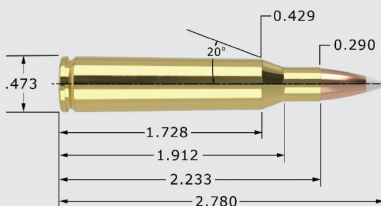

257 Rob +P - 110 grain

25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.		2.780"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®		AB 110gr. Spitzer	2.750"	0.418	0.238
CASE TYPE:	Nosler	PRIMER TYPE	CCI 200		
CASE HOLDS:	51.6 Gr. WATER	BARREL Length/Make	24" Lilja		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H4895	35.5 MAX.	2788	76%		
	33.5 *	2674	71%		
	31.5	2560	67%		
Varget	37.0 MAX.	2818	78%		
	35.0 *	2680	73%		
	33.0	2543	69%		
IMR 4350	43.0 MAX.	2868	89%		
	41.0	2758	85%		
	39.0 *	2647	81%		
H4831SC	46.0 MAX.	2872	93%		
	44.0 *	2777	89%		
	42.0	2682	85%		
W760	43.0 * MAX.	2875	87%		
	41.0	2750	83%		
	39.0	2625	79%		
RL22	46.0 MAX.	2888	97%		
	44.0 *	2773	93%		
	42.0	2658	88%		
H414	41.5 MAX.	2893	84%		
	39.5 *	2776	80%		
	37.5	2658	76%		
Big Game	42.0 MAX.	2921	83%		
	40.0	2799	79%		
	38.0 *	2677	75%		
N160	44.0 MAX.	2925	95%		
	42.0 *	2818	90%		
	40.0	2710	86%		
RL19	47.0 MAX.	2938	99%		
Most Accurate	45.0 *	2823	95%		
Powder Tested	43.0	2707	91%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load

This data was developed to the 257 Roberts +P pressure level of 58,000 psi, and should only be used in modern firearms and +P cases designed for these pressures.