


Cartridge

257 Rob +P - 115 grain

Version 9.0

NOSLER®

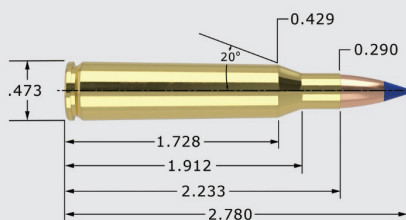

257 Rob +P - 115 grain

25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.	2.780"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT 115gr. Spitzer	2.750"	0.453	0.249
CT® Ballistic Silvertip®	BST 115gr. Spitzer	2.750"	0.453	0.249
Partition®	PT 115gr. Spitzer	2.750"	0.389	0.249

CASE TYPE:	Nosler	PRIMER TYPE	CCI 200
CASE HOLDS:	51.6 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 3031	33.5 * MAX. 2626		72%
	31.5 2511		68%
	29.5 2397		64%
IMR 4320	34.5 * MAX. 2710		73%
	32.5 2532		68%
	30.5 2354		64%
H4895	35.0 MAX. 2725		75%
	33.0 2594		70%
	31.0 * 2463		66%
Big Game	40.5 MAX. 2739		80%
	38.5 2640		76%
	36.5 * 2541		72%
IMR 4064	35.0 * MAX. 2785		75%
	33.0 2654		71%
	31.0 2523		66%
IMR 4350	40.0 * MAX. 2806		83%
	Most Accurate 38.0 2667		79%
	Powder Tested 36.0 2527		75%
IMR 4895	35.0 * MAX. 2807		74%
	33.0 2669		70%
	31.0 2530		65%
W760	40.0 MAX. 2809		81%
	38.0 2686		77%
	36.0 * 2563		73%
H380	38.0 MAX. 2816		78%
	36.0 2714		73%
	34.0 * 2612		69%
IMR 4831	42.5 MAX. 2827		88%
	40.5 2703		84%
	38.5 * 2579		80%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load

This data was developed to the 257 Roberts +P pressure level of 58,000 psi, and should only be used in modern firearms and +P cases designed for these pressures.