


# Cartridge

## 26 Nosler - 120 grain

Version 9.0

# NOSLER<sup>®</sup>

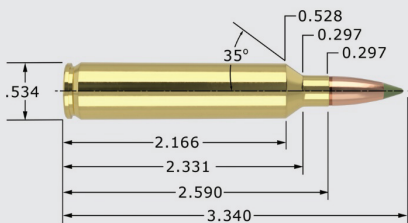

## 26 Nosler - 120 grain

## 6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip <sup>®</sup>	<b>BT</b>	120gr. Spitzer	3.300"	0.458	0.246
Expansion Tip <sup>®</sup>	<b>ET</b>	120gr. Spitzer	3.300"	0.497	0.246
Due to internal construction differences, always begin with starting loads when using Expansion Tip <sup>®</sup> products.					
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	94.3 Gr. WATER	BARREL Length/Make	26" Pac-Nor		
		BARREL Twist	1-8"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>RL33</b>	87.0 * MAX.	3542	94%		
		3400	92%		
		3258	90%		
<b>Norma 217</b>	82.0 MAX.	3560	98%		
	Most Accurate 80.0 *	3466	95%		
	Powder Tested 78.0	3372	93%		
<b>N165</b>	76.0 * MAX.	3586	90%		
		3495	87%		
		3404	85%		
<b>RL25</b>	80.0 MAX.	3601	92%		
	78.0 *	3481	90%		
		3361	88%		
<b>H1000</b>	78.0 * MAX.	3624	88%		
		3554	85%		
		3484	83%		
<b>Magnum</b>	82.0 MAX.	3636	88%		
	80.0 *	3603	86%		
		3570	84%		
<b>Retumbo</b>	83.0 * MAX.	3656	95%		
		3574	92%		
		3492	90%		
<b>IMR 7828</b>	75.0 * MAX.	3701	85%		
		3632	82%		
		3563	80%		
<b>US869</b>	94.0 * MAX.	3718	**	102%	
		3603		100%	
		3488		98%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested  
 \*\* = Compressed load