


Cartridge

26 Nosler - 123/125 grain

Version 9.0

NOSLER®

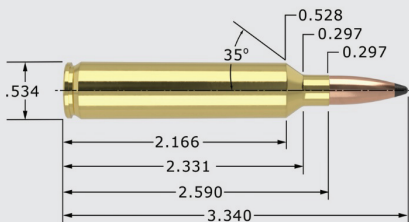

26 Nosler - 123/125 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	123gr. HPBT	3.300"	0.510	0.252
Partition®	PT	125gr. Spitzer	3.300"	0.449	0.256
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	95.0 Gr. WATER	BARREL Length/Make	26" Pac-Nor		
		BARREL Twist	1-8"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
N165	71.0 * MAX.	3352	83%		
	69.0	3305	81%		
	67.0	3257	78%		
RL25	78.0 MAX.	3388	89%		
	76.0	3368	87%		
	74.0 *	3348	85%		
Magnum	80.0 MAX.	3452	85%		
	78.0 *	3382	83%		
	76.0	3312	81%		
PP 4000-MR	72.0 * MAX.	3460	80%		
	70.0	3380	78%		
	68.0	3301	75%		
H1000	75.0 MAX.	3460	84%		
	73.0	3395	81%		
	71.0 *	3331	79%		
RL33	82.0 * MAX.	3470	88%		
	80.0	3432	86%		
	78.0	3394	84%		
MAGPRO	79.0 MAX.	3499	86%		
	77.0 *	3401	84%		
	75.0	3304	81%		
Norma 217	78.0 * MAX.	3527	92%		
	76.0	3447	90%		
	74.0	3366	88%		
US869	93.0 MAX.	3604	100%		
Most Accurate	91.0 *	3511	98%		
Powder Tested	89.0	3419	96%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load