


# Cartridge

## 26 Nosler - 129/130 grain

Version 9.0

# NOSLER®

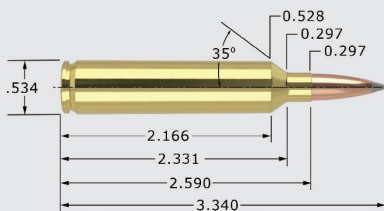

## 26 Nosler - 129/130 grain

## 6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	<b>ABLR</b> 129gr. Spitzer	3.300"	0.530	0.264
AccuBond®	<b>AB</b> 130gr. Spitzer	3.300"	0.488	0.266
Reduced Drag Factor™	<b>RDF</b> 130gr. HPBT	3.300"	0.615	0.266
CASE TYPE:	Nosler	PRIMER TYPE	WLRM	
CASE HOLDS:	93.0 Gr. WATER	BARREL Length/Make	26" Pac-Nor	
		BARREL Twist	1-8"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
<b>H1000</b>	75.0 * MAX. 3308		85%	
	73.0 3249		83%	
	71.0 3190		81%	
<b>IMR 7828 SSC</b>	74.0 MAX. 3321		82%	
	72.0 3227		80%	
	70.0 * 3134		78%	
<b>Retumbo</b>	74.0 MAX. 3331		86%	
	72.0 * 3281		83%	
	70.0 3232		81%	
<b>Magnum</b>	78.0 MAX. 3358		85%	
	76.0 * 3285		83%	
	74.0 3212		81%	
<b>Norma 217</b>	76.0 * MAX. 3374		92%	
	74.0 3301		89%	
	72.0 3229		87%	
<b>RL33</b>	82.0 * MAX. 3383		90%	
	80.0 3354		88%	
	78.0 3326		86%	
<b>20N29</b>	87.0 * MAX. 3410		**	104%
	85.0 3386		**	102%
	83.0 3362		99%	
<b>H50BMG</b>	87.0 MAX. 3450		97%	
	85.0 * 3418		95%	
	83.0 3386		92%	
<b>US869</b>	92.0 MAX. 3480		**	101%
	Most Accurate 90.0 3414		99%	
	Powder Tested 88.0 * 3349		97%	
<b>LRT</b>	90.5 MAX. 3485		97%	
	88.5 * 3405		95%	
	86.5 3325		92%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load