


# Cartridge

## 26 Nosler - 140/142 grain

Version 9.0

# NOSLER®

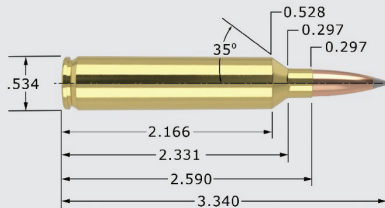

## 26 Nosler - 140/142 grain

## 6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	140gr. Spitzer	3.300"	0.509	0.287
Ballistic Tip®	<b>BT</b>	140gr. Spitzer	3.300"	0.509	0.287
Custom Competition®	<b>CC</b>	140gr. HPBT	3.300"	0.529	0.287
Partition®	<b>PT</b>	140gr. Spitzer	3.300"	0.490	0.287
Reduced Drag Factor™	<b>RDF</b>	140gr. HPBT	3.300"	0.658	0.287
AccuBond® Long Range	<b>ABLR</b>	142gr. Spitzer	3.300"	0.625	0.291

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	93.0 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
<b>Magnum</b>	73.5 * MAX.	3087	80%	
		3020	78%	
		2953	76%	
<b>H50BMG</b>	82.0 * MAX.	3110	91%	
		3028	89%	
		2947	87%	
<b>RL33</b>	79.0 * MAX.	3111	87%	
		3041	84%	
		2971	82%	
<b>RL50</b>	75.0 MAX.	3153	85%	
	73.0 *	3110	83%	
		3068	80%	
<b>Norma 217</b>	73.0 * MAX.	3193	88%	
		3131	86%	
		3069	83%	
<b>20N29</b>	86.0 MAX.	3209	** 103%	
	Most Accurate	84.0	3132	** 100%
	Powder Tested	82.0 *	3055	98%
<b>US869</b>	88.0 MAX.	3256	97%	
		3186	95%	
		3116	93%	
<b>LRT</b>	88.0 MAX.	3346	94%	
		3277	92%	
		3208	90%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load