


Cartridge

26 Nosler - 150 grain

Version 9.0

NOSLER®

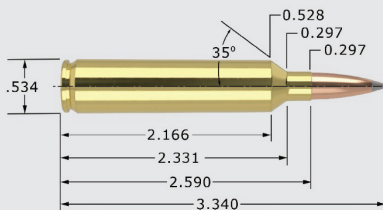

26 Nosler - 150 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR 150gr. Spitzer	3.300"	0.634	0.307

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	90.2 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
--------------------	-------------------------	---------------------------	------------------------------

H50BMG	79.0	MAX. 2994		91%
Most Accurate	77.0	2920		88%
Powder Tested	75.0 *	2846		86%
US869	86.0	MAX. 3224		98%
	84.0 *	3158		96%
	82.0	3092		93%
LRT	86.0	MAX. 3243		95%
	84.0	3176		93%
	82.0 *	3109		90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load