


# Cartridge

260 Rem - 120 grain

Version 9.0

# NOSLER®

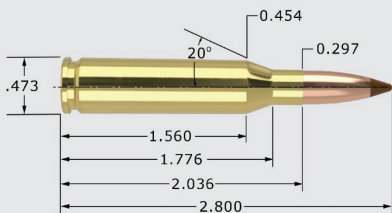

260 Rem - 120 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	<b>BT</b> 120gr. Spitzer	2.800"	0.458	0.246
Expansion Tip®	<b>ET</b> 120gr. Spitzer	2.770"	0.497	0.246

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	47.8 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>Varget</b>	40.0 MAX.	2872	90%
	38.0	2757	86%
	36.0 *	2642	81%
<b>RL15</b>	40.0 * MAX.	2888	87%
	38.0	2785	83%
	36.0	2683	78%
<b>IMR 4064</b>	39.0 * MAX.	2898	90%
	37.0	2776	86%
	35.0	2655	81%
<b>H380</b>	44.5 * MAX.	2944	98%
	42.5	2829	94%
	40.5	2714	89%
<b>IMR 4350</b>	45.5 MAX.	2972	** 102%
	43.5 *	2881	97%
	41.5	2789	93%
<b>RL19</b>	47.0 * MAX.	2973	** 107%
	45.0	2873	** 102%
	43.0	2773	98%
<b>H414</b>	45.0 * MAX.	3005	98%
	43.0	2864	94%
	41.0	2724	89%
<b>W760</b>	45.0 * MAX.	3006	99%
	43.0	2870	94%
	41.0	2735	90%
<b>Hunter</b>	48.0 MAX.	3043	** 104%
	Most Accurate	2960	99%
	Powder Tested	44.0 * 2877	95%
<b>N560</b>	48.0 MAX.	3050	** 112%
	46.0	2912	** 107%
	44.0 *	2773	** 102%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load