


Cartridge

260 Rem - 123/125 grain

Version 9.0

NOSLER®

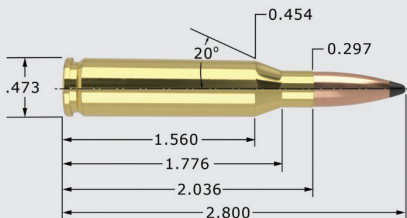

260 Rem - 123/125 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		2.800"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	123gr. HPBT	2.800"	0.510	0.252
Partition®	PT	125gr. Spitzer	2.800"	0.449	0.256

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	47.8 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
Varget	37.5 MAX.	2776	85%	
	35.5 *	2665	80%	
	33.5	2554	76%	
IMR 4350	43.0 MAX.	2827	96%	
	41.0 *	2723	92%	
	39.0	2619	87%	
H380	42.0 * MAX.	2828	92%	
	40.0	2730	88%	
	38.0	2633	84%	
W760	43.0 * MAX.	2845	94%	
	41.0	2728	90%	
	39.0	2612	85%	
Hunter	45.0 MAX.	2878	97%	
	43.0 *	2816	93%	
	41.0	2755	88%	
IMR 4064	39.0 * MAX.	2903	90%	
	37.0	2778	86%	
	35.0	2653	81%	
RL15	40.0 * MAX.	2903	87%	
	38.0	2798	83%	
	36.0	2692	78%	
RL19	46.5 * MAX.	2948	** 106%	
	Most Accurate	44.5	2815	** 101%
	Powder Tested	42.5	2681	97%
N560	47.0 MAX.	2968	** 109%	
	45.0	2849	** 105%	
	43.0 *	2730	100%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load