


# Cartridge

260 Rem - 129/130 grain

Version 9.0

# NOSLER®

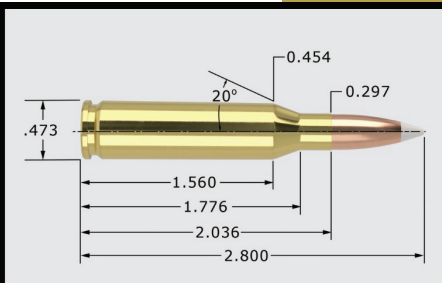

260 Rem - 129/130 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	<b>ABLR</b> 129gr. Spitzer	2.800"	0.530	0.264
AccuBond®	<b>AB</b> 130gr. Spitzer	2.800"	0.488	0.266
Reduced Drag Factor™	<b>RDF</b> 130gr. HPBT	2.800"	0.615	0.266

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	47.0 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL19</b> Most Accurate Powder Tested	46.0 MAX. 2825		** 106%
	44.0 * 2710		** 102%
	42.0 2594		97%
<b>N550</b>	42.5 MAX. 2836		** 100%
	40.5 * 2704		96%
	38.5 2571		91%
<b>AA 2700</b>	43.0 * MAX. 2845		95%
	41.0 2697		91%
	39.0 2549		86%
<b>W760</b>	43.5 MAX. 2846		97%
	41.5 * 2726		92%
	39.5 2607		88%
<b>IMR 4831</b>	46.0 MAX. 2863		** 105%
	44.0 2741		100%
	42.0 * 2619		96%
<b>IMR 4350</b>	45.0 * MAX. 2865		** 102%
	43.0 2741		98%
	41.0 2617		93%
<b>Norma 204</b>	44.0 MAX. 2876		** 104%
	42.0 * 2734		99%
	40.0 2592		95%
<b>Hunter</b>	46.0 MAX. 2899		** 101%
	44.0 * 2776		97%
	42.0 2654		92%
<b>H4350</b>	43.5 * MAX. 2907		98%
	41.5 2790		93%
	39.5 2673		89%
<b>RL17</b>	44.0 MAX. 2965		97%
	42.0 * 2822		93%
	40.0 2679		88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

\* = Most accurate load tested

\*\* = Compressed load