


Cartridge

260 Rem - 140/142 grain

Version 9.0

NOSLER®

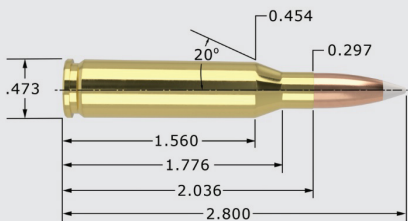

260 Rem - 140/142 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 140gr. Spitzer	2.800"	0.509	0.287
Ballistic Tip®	BT 140gr. Spitzer	2.800"	0.509	0.287
Custom Competition®	CC 140gr. HPBT	2.800"	0.529	0.287
Partition®	PT 140gr. Spitzer	2.800"	0.490	0.287
Reduced Drag Factor™	RDF 140gr. HPBT	2.800"	0.658	0.287
AccuBond® Long Range*	ABLR 142gr. Spitzer	2.800"	0.625	0.291

*1-8" twist recommended for the 142gr AccuBond® Long Range

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	47.4 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4064	37.0 MAX. 2680		86%
	35.0 * 2564		82%
	33.0 2449		77%
H4831SC Most Accurate Powder Tested	46.0 MAX. 2769		** 101%
	44.0 * 2665		97%
	42.0 2560		92%
H1000	50.0 MAX. 2784		** 112%
	48.0 2688		** 107%
	46.0 * 2592		** 103%
IMR 4350	43.0 MAX. 2785		97%
	41.0 2655		93%
	39.0 * 2526		88%
RL19	45.0 MAX. 2798		** 103%
	43.0 2675		99%
	41.0 * 2553		94%
Hunter	45.0 MAX. 2811		98%
	43.0 2714		94%
	41.0 * 2618		89%
IMR 7828	46.5 MAX. 2816		** 104%
	44.5 2689		100%
	42.5 * 2563		95%
IMR 4831	44.0 MAX. 2821		99%
	42.0 2694		95%
	40.0 * 2567		90%
N560	45.5 MAX. 2838		** 107%
	43.5 * 2708		** 102%
	41.5 2578		97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load