


Cartridge

264 Win Mag - 100 grain

Version 9.0

NOSLER®

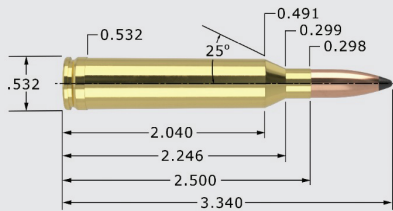

264 Win Mag - 100 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	100gr. Spitzer	3.220"	0.350	0.205
Custom Competition®	CC	100gr. HPBT	3.220"	0.362	0.205
Partition®	PT	100gr. Spitzer	3.220"	0.326	0.205

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	82.0 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350 Most Accurate Powder Tested	62.5 MAX. 3494		82%
	60.5 3399		79%
	58.5 * 3304		76%
IMR 7828	69.0 MAX. 3494		90%
	67.0 3412		87%
	65.0 * 3330		84%
Hunter	64.5 * MAX. 3498		81%
	62.5 3425		79%
	60.5 3352		76%
RL22	67.5 MAX. 3516		89%
	65.5 3457		87%
	63.5 * 3398		84%
H4350	63.5 MAX. 3534		82%
	61.5 3450		79%
	59.5 * 3367		77%
H4831SC	69.0 MAX. 3542		88%
	67.0 * 3451		85%
	65.0 3360		83%
W760	63.5 MAX. 3562		81%
	61.5 3451		79%
	59.5 * 3340		76%
N160	66.0 MAX. 3558		89%
	64.0 * 3477		87%
	62.0 3396		84%
RL19	68.5 * MAX. 3583		91%
	66.5 3454		88%
	64.5 3325		85%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load