


# Cartridge

## 264 Win Mag - 120 grain

Version 9.0

# NOSLER<sup>®</sup>

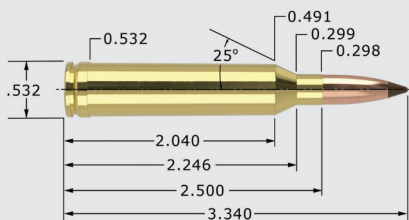

## 264 Win Mag - 120 grain

## 6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip <sup>®</sup>	<b>BT</b>	120gr. Spitzer	3.220"	0.458	0.246
Expansion Tip <sup>®</sup>	<b>ET</b>	120gr. Spitzer	3.220"	0.497	0.246
Due to internal construction differences, always begin with starting loads when using Expansion Tip <sup>®</sup> products.					
CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2M		
CASE HOLDS:	78.9 Gr. WATER	BARREL Length/Make	24" Wiseman		
		BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>IMR 4320</b>	53.0 MAX.	3100	73%		
	51.0	2990	70%		
	49.0 *	2880	68%		
<b>W760</b>	58.0 * MAX.	3121	77%		
	56.0	3039	74%		
	54.0	2956	72%		
<b>IMR 4064</b>	54.0 MAX.	3140	76%		
	52.0	3060	73%		
	50.0 *	2980	70%		
<b>IMR 4831</b>	62.0 * MAX.	3162	84%		
	60.0	3057	81%		
	58.0	2952	79%		
<b>RL22</b>	62.5 MAX.	3187	86%		
	60.5	3099	83%		
	58.5 *	3011	81%		
<b>Hunter</b>	60.0 MAX.	3199	78%		
	58.0	3103	76%		
	56.0 *	3007	73%		
<b>IMR 4350</b> Most Accurate Powder Tested	60.0 * MAX.	3202	81%		
	58.0	3127	79%		
	56.0	3052	76%		
<b>H4350</b>	54.5 MAX.	3204	73%		
	52.5 *	3126	70%		
	50.5	3048	68%		
<b>RL19</b>	64.0 MAX.	3307	88%		
	62.0	3214	85%		
	60.0 *	3121	83%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load