


Cartridge

264 Win Mag - 123/125 grain

Version 9.0

NOSLER®

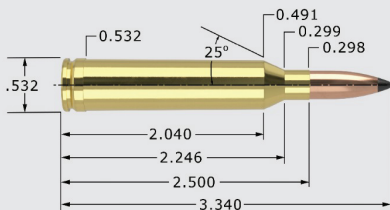

264 Win Mag - 123/125 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.	
Custom Competition®	CC	123gr. HPBT	3.220"	0.510	0.252	
Partition®	PT	125gr. Spitzer	3.220"	0.449	0.256	
CASE TYPE:	Nosler		PRIMER TYPE	WLRM		
CASE HOLDS:	81.2	Gr. WATER	BARREL Length/Make	24" H-S Prec.		
			BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
IMR 4350	57.5 * MAX.	3097	76%			
		3022	73%			
		2947	70%			
H4350	55.5 MAX.	3117	72%			
	53.5 *	3037	70%			
		2957	67%			
IMR 4831	61.5 * MAX.	3126	81%			
		3003	78%			
		2881	76%			
W760	56.5 MAX.	3135	73%			
		3038	70%			
	52.5 *	2941	68%			
Hunter	59.0 MAX.	3157	75%			
		3093	72%			
	55.0 *	3030	70%			
RL19	61.0 MAX.	3218	82%			
	59.0 *	3127	79%			
		3036	76%			
MAGPRO	70.0 MAX.	3242	89%			
	Most Accurate	68.0 *	3175	86%		
	Powder Tested	66.0	3108	84%		
Magnum	70.0 MAX.	3245	88%			
		3186	85%			
	66.0 *	3127	83%			
LRT	78.5 * MAX.	3272	96%			
		3128	94%			
		2984	91%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load