


Cartridge

264 Win Mag - 129/130 grain

Version 9.0

NOSLER®

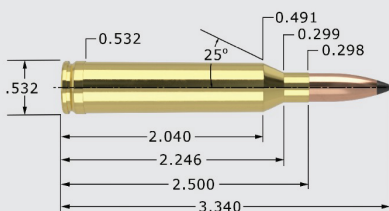

264 Win Mag - 129/130 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR 129gr. Spitzer	3.220"	0.530	0.264
AccuBond®	AB 130gr. Spitzer	3.220"	0.488	0.266
Reduced Drag Factor™	RDF 130gr. HPBT	3.220"	0.615	0.266

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	78.0 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Retumbo	67.0 * MAX. 2987		92%
	65.0 2919		90%
	63.0 2851		87%
Norma MRP	61.0 * MAX. 3029		86%
	59.0 2927		83%
	57.0 2825		80%
IMR 4350	55.0 MAX. 3039		75%
	Most Accurate 53.0 2951		73%
	Powder Tested 51.0 * 2863		70%
H4831SC	57.5 MAX. 3055		77%
	55.5 * 2966		74%
	53.5 2877		71%
N560	59.5 MAX. 3105		85%
	57.5 3017		82%
	55.5 * 2929		79%
RL19	58.5 * MAX. 3113		82%
	56.5 3032		79%
	54.5 2951		76%
IMR 4831	58.5 MAX. 3134		80%
	56.5 * 3045		77%
	54.5 2956		75%
IMR 7828	61.0 MAX. 3148		83%
	59.0 3060		80%
	57.0 * 2972		78%
RL22	61.0 MAX. 3166		85%
	59.0 3087		82%
	57.0 * 3008		79%
LRT	77.5 MAX. 3195		99%
	75.5 3105		96%
	73.5 * 3014		94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load