


Cartridge

264 Win Mag - 140/142 grain

Version 9.0

NOSLER®

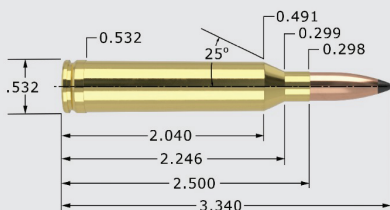

264 Win Mag - 140/142 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 140gr. Spitzer	3.220"	0.509	0.287
Ballistic Tip®	BT 140gr. Spitzer	3.220"	0.509	0.287
Custom Competition®	CC 140gr. HPBT	3.220"	0.529	0.287
Partition®	PT 140gr. Spitzer	3.220"	0.490	0.287
Reduced Drag Factor™	RDF 140gr. HPBT	3.220"	0.658	0.287
AccuBond® Long Range*	ABLR 142gr. Spitzer	3.220"	0.625	0.291

*1-8" twist recommended for the 142gr AccuBond® Long Range

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	79.6 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	50.0 * MAX. 2848	[Bar]	68%
	48.0 2763	[Bar]	66%
	46.0 2678	[Bar]	63%
IMR 4064	51.0 MAX. 2860	[Bar]	71%
	49.0 2790	[Bar]	68%
	47.0 * 2720	[Bar]	65%
Hunter	54.0 MAX. 2913	[Bar]	70%
	52.0 2835	[Bar]	67%
	50.0 * 2756	[Bar]	65%
RL22	59.0 MAX. 2929	[Bar]	81%
	Most Accurate 57.0 2821	[Bar]	78%
	Powder Tested 55.0 * 2712	[Bar]	75%
H4350	52.0 MAX. 2930	[Bar]	69%
	50.0 * 2852	[Bar]	66%
	48.0 2775	[Bar]	64%
W760	54.5 * MAX. 2940	[Bar]	72%
	52.5 2865	[Bar]	69%
	50.5 2791	[Bar]	66%
IMR 4831	59.0 MAX. 2970	[Bar]	79%
	57.0 2870	[Bar]	77%
	55.0 * 2770	[Bar]	74%
IMR 4350	57.0 * MAX. 2980	[Bar]	77%
	55.0 2920	[Bar]	74%
	53.0 2860	[Bar]	71%
RL19	57.5 MAX. 3024	[Bar]	79%
	55.5 * 2948	[Bar]	76%
	53.5 2872	[Bar]	73%
LRT	75.0 * MAX. 3085	[Bar]	94%
	73.0 2998	[Bar]	91%
	71.0 2910	[Bar]	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load