


# Cartridge

## 27 Nosler - 130 grain

Version 9.0

# NOSLER®

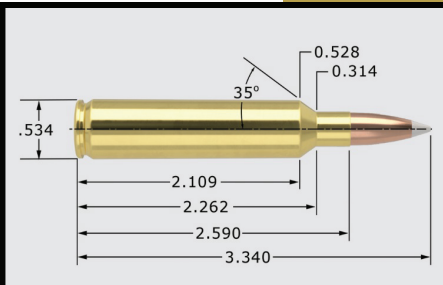

## 27 Nosler - 130 grain

## 270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	130gr. Spitzer	3.340"	0.435	0.242
Ballistic Tip®	<b>BT</b>	130gr. Spitzer	3.340"	0.433	0.242
CT® Ballistic Silvertip®	<b>BST</b>	130gr. Spitzer	3.340"	0.433	0.242
Expansion Tip®	<b>ET</b>	130gr. Spitzer	3.290"	0.459	0.242
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	130gr. Spitzer	3.300"	0.416	0.242

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	91.5 Gr. WATER	BARREL Length/Make	26" H-S Prec.
		BARREL Twist	1-8.5"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
<b>IMR 7828 SSC</b>	74.0 * MAX.	3480	83%	
	72.0	3406	81%	
	70.0	3333	79%	
<b>IMR 8133</b>	80.5 * MAX.	3490	97%	
	Most Accurate	78.5	3394	95%
	Powder Tested	76.5	3298	92%
<b>IMR 7977</b>	81.0 * MAX.	3517	90%	
	79.0 *	3439	88%	
	77.0	3361	86%	
<b>H1000</b>	79.5 MAX.	3532	95%	
	77.5 *	3471	93%	
	75.5	3410	90%	
<b>MAGPRO</b>	80.0 * MAX.	3533	92%	
	78.0	3473	90%	
	76.0	3413	87%	
<b>RL26</b>	77.5 MAX.	3548	86%	
	75.5 *	3455	84%	
	73.5	3361	82%	
<b>Norma MRP</b>	77.0 * MAX.	3548	92%	
	75.0	3457	90%	
	73.0	3367	88%	
<b>LRT</b>	89.5 MAX.	3554	97%	
	87.5 *	3487	95%	
	85.5	3421	93%	
<b>Norma 217</b>	84.0 MAX.	3589	** 103%	
	82.0 *	3505	** 101%	
	80.0	3421	98%	
<b>RL25</b>	81.5 * MAX.	3593	97%	
	79.5	3493	94%	
	77.5	3393	92%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load