


Cartridge

27 Nosler - 140 grain

Version 9.0

NOSLER®

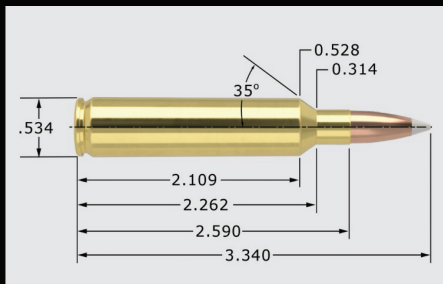

27 Nosler - 140 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 140gr. Spitzer	3.340"	0.460	0.261
Ballistic Tip®	BT 140gr. Spitzer	3.340"	0.456	0.261
Partition®	PT 140gr. Spitzer	3.300"	0.432	0.261

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	91.1 Gr. WATER	BARREL Length/Make	26" H-S Prec.
		BARREL Twist	1-8.5"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 7977	78.0 MAX. 3320		92%
	76.0 * 3240		90%
	74.0 3160		87%
H1000	75.0 MAX. 3332		87%
	73.0 * 3268		85%
	71.0 3204		82%
IMR 7828 SSC	71.5 MAX. 3335		81%
	69.5 * 3266		79%
	67.5 3197		76%
IMR 8133	78.0 * MAX. 3341		95%
	76.0 3255		92%
	74.0 3168		90%
RL26	74.0 MAX. 3368		83%
	72.0 * 3278		81%
	70.0 3188		78%
MAGPRO	77.5 MAX. 3378		88%
	75.5 3312		85%
	73.5 * 3246		83%
Magnum	78.5 MAX. 3381		87%
	76.5 * 3313		85%
	74.5 3246		83%
LRT	87.5 MAX. 3396		95%
	85.5 * 3325		93%
	83.5 3253		91%
Norma 217	79.0 * MAX. 3399		97%
	Most Accurate 77.0 3326		95%
	Powder Tested 75.0 3253		93%
RL33	86.5 MAX. 3470		97%
	84.5 * 3382		95%
	82.5 3294		92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load