


Cartridge

27 Nosler - 150 grain

Version 9.0

NOSLER®

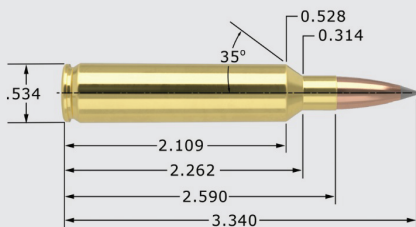

27 Nosler - 150 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 150gr. Spitzer	3.340"	0.500	0.279
AccuBond® Long Range	ABLR 150gr. Spitzer	3.340"	0.591	0.279
Ballistic Tip®	BT 150gr. Spitzer	3.340"	0.496	0.279
CT® Ballistic Silvertip®	BST 150gr. Spitzer	3.340"	0.496	0.279
Partition®	PT 150gr. Spitzer	3.340"	0.465	0.279

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	91.5 Gr. WATER	BARREL Length/Make	26" H-S Prec.
		BARREL Twist	1-8.5"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 7977	75.0 MAX. 3235		88%
Most Accurate Powder Tested	73.0 * 3183		86%
	71.0 3130		83%
IMR 8133	76.0 * MAX. 3240		92%
	74.0 3154		89%
	72.0 3068		87%
H50BMG	85.0 MAX. 3252		96%
	83.0 * 3201		94%
	81.0 3150		92%
H1000	74.5 MAX. 3262		86%
	72.5 * 3200		84%
	70.5 3137		82%
MAGPRO	75.5 * MAX. 3282		85%
	73.5 3208		83%
	71.5 3133		81%
Magnum	77.5 MAX. 3301		86%
	75.5 3230		84%
	73.5 * 3158		82%
Norma 217	78.0 * MAX. 3321		96%
	76.0 3248		93%
	74.0 3175		91%
LRT	87.0 * MAX. 3322		95%
	85.0 3252		92%
	83.0 3182		90%
RL50	85.5 MAX. 3348		98%
	83.5 3260		96%
	81.5 * 3171		94%
US869	89.5 MAX. 3404		100%
	87.5 * 3329		98%
	85.5 3254		96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load