


Cartridge

27 Nosler - 160/165 grain

Version 9.0

NOSLER®

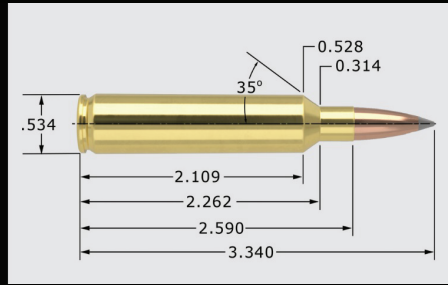

27 Nosler - 160/165 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	PT	160gr. Semi-Spitzer	3.320"	0.434	0.298
AccuBond® Long Range	ABLR	165gr. Spitzer	3.340"	0.620	0.307
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	87.8 Gr. WATER	BARREL Length/Make	26" H-S Prec.		
		BARREL Twist	1-8.5"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 7977	72.5 * MAX. 3034		89%		
	70.5 2963		86%		
	68.5 2893		84%		
IMR 8133	72.5 * MAX. 3038		91%		
	70.5 2978		89%		
	68.5 2918		86%		
H50BMG	82.0 * MAX. 3086		97%		
	80.0 3034		94%		
	78.0 2982		92%		
H1000	72.5 * MAX. 3090		87%		
	70.5 3026		85%		
	68.5 2961		83%		
Magnum Most Accurate Powder Tested	74.5 MAX. 3101		86%		
	72.5 * 3034		84%		
	70.5 2967		82%		
Norma 217	75.0 MAX. 3119		96%		
	73.0 * 3037		93%		
	71.0 2955		91%		
LRT	82.5 MAX. 3131		93%		
	80.5 * 3066		91%		
	78.5 3001		89%		
MAGPRO	75.5 MAX. 3132		89%		
	73.5 3085		86%		
	71.5 * 3039		84%		
RL50	82.0 * MAX. 3144		98%		
	80.0 3071		96%		
	78.0 2998		94%		
US869	86.0 * MAX. 3237		100%		
	84.0 3174		98%		
	82.0 3111		96%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load