


Cartridge

270 WSM - 130 grain

Version 9.0

NOSLER®

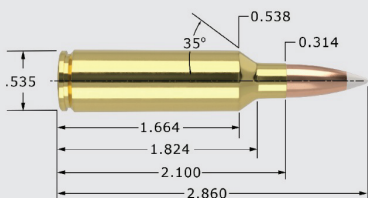

270 WSM - 130 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	130gr. Spitzer	2.850"	0.435	0.242
Ballistic Tip®	BT	130gr. Spitzer	2.850"	0.433	0.242
CT® Ballistic Silvertip®	BST	130gr. Spitzer	2.850"	0.433	0.242
Expansion Tip®	ET	130gr. Spitzer	2.820"	0.459	0.242
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	130gr. Spitzer	2.850"	0.416	0.242

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	73.0 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10" 4 groove

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC	66.5 MAX. 3238	<div style="width: 85%;"></div>	95%
	64.5 3151	<div style="width: 75%;"></div>	92%
	62.5 * 3064	<div style="width: 45%;"></div>	89%
W760	59.0 * MAX. 3259	<div style="width: 80%;"></div>	85%
	57.0 3195	<div style="width: 70%;"></div>	82%
	55.0 3132	<div style="width: 55%;"></div>	79%
IMR 4350 Most Accurate Powder Tested	63.0 MAX. 3284	<div style="width: 80%;"></div>	92%
	61.0 3162	<div style="width: 65%;"></div>	89%
	59.0 * 3041	<div style="width: 35%;"></div>	86%
RL19	65.5 MAX. 3302	<div style="width: 85%;"></div>	98%
	63.5 * 3177	<div style="width: 70%;"></div>	95%
	61.5 3051	<div style="width: 35%;"></div>	92%
Magnum	73.0 MAX. 3311	<div style="width: 85%;"></div>	** 102%
	71.0 3236	<div style="width: 75%;"></div>	99%
	69.0 * 3162	<div style="width: 60%;"></div>	96%
IMR 4831	61.0 MAX. 3334	<div style="width: 85%;"></div>	89%
	59.0 3225	<div style="width: 75%;"></div>	86%
	57.0 * 3116	<div style="width: 55%;"></div>	84%
IMR 7828	65.5 MAX. 3390	<div style="width: 85%;"></div>	95%
	63.5 3283	<div style="width: 75%;"></div>	93%
	61.5 * 3176	<div style="width: 60%;"></div>	90%
MAGPRO	72.0 MAX. 3390	<div style="width: 85%;"></div>	** 102%
	70.0 * 3315	<div style="width: 75%;"></div>	99%
	68.0 3241	<div style="width: 65%;"></div>	96%
RL22	65.0 MAX. 3393	<div style="width: 85%;"></div>	97%
	63.0 * 3306	<div style="width: 75%;"></div>	94%
	61.0 3219	<div style="width: 60%;"></div>	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load