


Cartridge

270 WSM - 140 grain

Version 9.1

NOSLER®

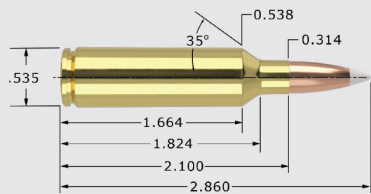

270 WSM - 140 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	140gr. Spitzer	2.850"	0.460	0.261
Ballistic Tip®	BT	140gr. Spitzer	2.850"	0.456	0.261
Partition®	PT	140gr. Spitzer	2.850"	0.432	0.261

CASE TYPE:	Nosler		PRIMER TYPE	WLRM
CASE HOLDS:	72.4	Gr. WATER	BARREL Length/Make	24 Wiseman
			BARREL Twist	1-10" 4 groove

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
-------------	------------------	--------------------	-----------------------

H4831SC	62.5	MAX.	3111		90%
	60.5		3032		87%
	58.5	*	2952		84%
IMR 4350	60.5	MAX.	3155		89%
	58.5	*	3047		86%
	56.5		2939		83%
H1000	65.0	* MAX.	3162		95%
	63.0		3092		92%
	61.0		3022		89%
RL19	63.5	MAX.	3189		95%
	61.5		3107		92%
	59.5	*	3025		89%
Magnum	71.0	MAX.	3193		100%
	69.0		3130		97%
	67.0	*	3067		94%
N170	67.0	MAX.	3201	**	103%
	65.0	*	3133		100%
	63.0		3066		97%
RL22	62.0	MAX.	3226		93%
	60.0	*	3141		90%
	58.0		3056		87%
MAGPRO	69.5	MAX.	3243		99%
Most Accurate	67.5	*	3170		96%
Powder Tested	65.5		3098		93%
IMR 7828	63.0	* MAX.	3264		93%
	61.0		3158		90%
	59.0		3053		87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load