


Cartridge

270 WSM - 150 grain

Version 9.0

NOSLER®

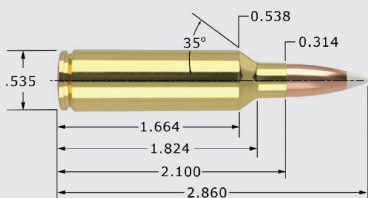

270 WSM - 150 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	2.850"	0.500	0.279
AccuBond® Long Range	ABLR	150gr. Spitzer	2.850"	0.591	0.279
Ballistic Tip®	BT	150gr. Spitzer	2.850"	0.496	0.279
CT® Ballistic Silvertip®	BST	150gr. Spitzer	2.850"	0.496	0.279
Partition®	PT	150gr. Spitzer	2.850"	0.465	0.279

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	71.8 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC	60.0 MAX.	2967	87%
Most Accurate	58.0	2885	84%
Powder Tested	56.0 *	2804	81%
IMR 4350	58.0 * MAX.	2989	86%
	56.0	2900	83%
	54.0	2810	80%
RL19	60.5 MAX.	3006	92%
	58.5 *	2919	89%
	56.5	2833	86%
H1000	63.5 * MAX.	3074	94%
	61.5	2991	91%
	59.5	2909	88%
Magnum	69.0 MAX.	3089	98%
	67.0 *	2989	95%
	65.0	2888	92%
IMR 7828	61.5 MAX.	3114	91%
	59.5 *	3030	88%
	57.5	2946	85%
N170	67.0 * MAX.	3147	** 104%
	65.0	3076	** 101%
	63.0	3006	97%
RL22	61.0 MAX.	3158	92%
	59.0	3063	89%
	57.0 *	2968	86%
MAGPRO	68.0 MAX.	3193	98%
	66.0 *	3110	95%
	64.0	3028	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load