


Cartridge

270 Wby Mag - 130 grain

Version 9.0

NOSLER®

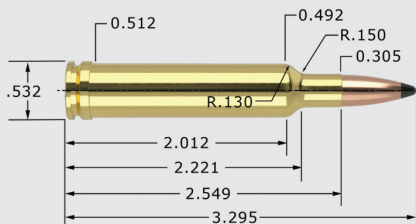

270 Wby Mag - 130 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		3.295"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	130gr. Spitzer	3.230"	0.435	0.242
Ballistic Tip®	BT	130gr. Spitzer	3.230"	0.433	0.242
CT® Ballistic Silvertip®	BST	130gr. Spitzer	3.230"	0.433	0.242
Expansion Tip®	ET	130gr. Spitzer	3.230"	0.459	0.242
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	130gr. Spitzer	3.230"	0.416	0.242

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	81.7 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
IMR 4831	69.0 * MAX.	3240	90%	
	67.0	3130	88%	
	65.0	3020	85%	
H4831	72.0 * MAX.	3260	92%	
	70.0	3110	89%	
	68.0	2960	87%	
MAGPRO	76.0 MAX.	3304	96%	
	74.0 *	3212	93%	
	72.0	3120	91%	
N560	71.0 MAX.	3306	97%	
	69.0 *	3221	94%	
	67.0	3136	91%	
IMR 4350	68.0 * MAX.	3350	89%	
	66.0	3250	86%	
	64.0	3150	84%	
RL25	75.0 * MAX.	3353	100%	
	73.0	3251	97%	
	71.0	3150	94%	
RL19	71.0 * MAX.	3414	94%	
	Most Accurate	69.0	3318	92%
	Powder Tested	67.0	3221	89%
RL22	73.0 * MAX.	3467	97%	
	71.0	3369	94%	
	69.0	3272	92%	
IMR 7828	74.5 * MAX.	3476	97%	
	72.5	3376	94%	
	70.5	3277	92%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load