


# Cartridge

## 270 Wby Mag - 160 grain

Version 9.0

# NOSLER®

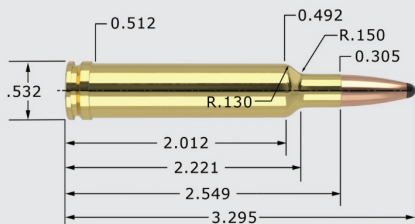

## 270 Wby Mag - 160 grain

## 270 Cal. (.277")

<b>MAXIMUM SAAMI O.A.C.L.</b>	<b>3.295"</b>	<b>TESTED O.A.C.L.</b>	<b>B.C.</b>	<b>S.D.</b>
Partition®	<b>PT</b> 160gr. Semi-Spitzer	3.230"	0.434	0.298

<b>CASE TYPE:</b>	Nosler	<b>PRIMER TYPE</b>	Fed 215
<b>CASE HOLDS:</b>	79.8 Gr. WATER	<b>BARREL Length/Make</b>	26" Lilja
		<b>BARREL Twist</b>	1-10"

<b>POWDER TYPE</b>	<b>POWDER CHG. GRS.</b>	<b>MUZZLE VEL. F.P.S.</b>	<b>LOAD DENSITY (VOLUME)</b>	
<b>RL22</b>	64.5 * MAX.	2872	88%	
	62.5	2798	85%	
	60.5	2723	82%	
<b>IMR 4831</b>	65.0 MAX.	2920	87%	
	63.0	2840	84%	
	61.0 *	2760	82%	
<b>H4831</b>	67.5 MAX.	2970	88%	
	65.5	2880	86%	
	63.5 *	2790	83%	
<b>IMR 4350</b>	63.0 MAX.	2980	84%	
	61.0	2900	82%	
	59.0 *	2820	79%	
<b>RL25</b>	<b>71.0 MAX.</b>	<b>3038</b>	<b>97%</b>	
	Most Accurate Powder Tested	69.0 *	2957	94%
		67.0	2876	91%
<b>Magnum</b>	76.0 MAX.	3041	97%	
	74.0	2966	94%	
	72.0 *	2891	92%	
<b>Retumbo</b>	74.0 * MAX.	3047	100%	
	72.0	2974	97%	
	70.0	2900	94%	
<b>IMR 7828</b>	70.0 * MAX.	3100	93%	
	68.0	3016	91%	
	66.0	2933	88%	
<b>N560</b>	69.0 MAX.	3111	96%	
	67.0	3022	93%	
	65.0 *	2933	91%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested  
 \*\* = Compressed load