


Cartridge

270 Win - 110 grain

Version 9.0

NOSLER®

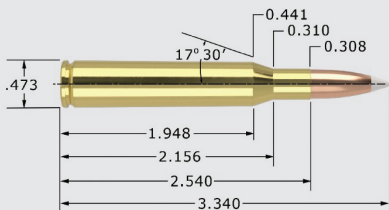

270 Win - 110 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond®		AB	110gr. Spitzer	3.275"	0.370	0.205
CASE TYPE:	Nosler		PRIMER TYPE		WLR	
CASE HOLDS:	64.6	Gr. WATER	BARREL Length/Make		24" Shilen	
			BARREL Twist		1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
H4895	48.0	MAX. 3276	82%			
	46.0	* 3177	78%			
	44.0	3078	75%			
N150	50.0	MAX. 3311	91%			
	48.0	* 3212	87%			
	46.0	3114	84%			
H380	53.0	MAX. 3343	86%			
	51.0	* 3259	83%			
	49.0	3175	80%			
Varget	50.5	MAX. 3367	85%			
	48.5	* 3259	81%			
	46.5	3151	78%			
IMR 4320	50.5	MAX. 3370	85%			
	48.5	3260	82%			
	46.5	* 3151	78%			
RL15	51.0	MAX. 3378	82%			
	49.0	* 3267	79%			
	47.0	3157	76%			
IMR 4064	51.0	MAX. 3403	87%			
	Most Accurate	49.0	* 3276	84%		
	Powder Tested	47.0	3149	80%		
IMR 4350	57.0	* MAX. 3442	94%			
	55.0	3311	91%			
	53.0	3180	88%			
W760	56.0	MAX. 3479	91%			
	54.0	3352	88%			
	52.0	* 3225	84%			
Norma 204	57.0	MAX. 3498	98%			
	55.0	* 3359	95%			
	53.0	3220	91%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load