


Cartridge

270 Win - 130 grain

Version 9.0

NOSLER®

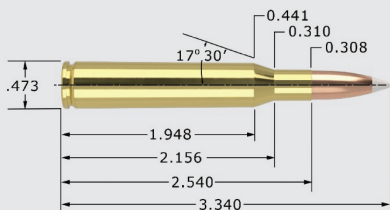

270 Win - 130 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	130gr. Spitzer	3.320"	0.435	0.242
Ballistic Tip®	BT	130gr. Spitzer	3.320"	0.433	0.242
CT® Ballistic Silvertip®	BST	130gr. Spitzer	3.320"	0.433	0.242
Expansion Tip®	ET	130gr. Spitzer	3.300"	0.459	0.242
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	130gr. Spitzer	3.320"	0.416	0.242

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	64.6 Gr. WATER	BARREL Length/Make	24" Shilen
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	47.0 MAX.	2928	79%
	45.0	2833	76%
	43.0 *	2738	72%
H380	50.0 MAX.	2932	81%
	48.0	2847	78%
	46.0 *	2762	75%
IMR 4895	46.0 * MAX.	2960	77%
	44.0	2870	74%
	42.0	2780	71%
H414	54.5 * MAX.	3062	88%
	52.5	2937	85%
	50.5	2812	81%
IMR 4350	55.0 * MAX.	3078	91%
	53.0	2953	88%
	51.0	2828	84%
Hunter	57.5 MAX.	3089	92%
	55.5	2989	89%
	53.5 *	2888	85%
RL22	58.0 * MAX.	3100	98%
	56.0	2950	94%
	54.0	2800	91%
N160	55.0 MAX.	3102	95%
	53.0	3004	91%
	51.0 *	2907	88%
H4831SC	59.0 MAX.	3118	95%
	Most Accurate	3010	92%
	Powder Tested	55.0 * 2903	89%
W760	54.0 * MAX.	3157	88%
	52.0	3051	84%
	50.0	2945	81%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load