


Cartridge

270 Win - 140 grain

Version 9.0

NOSLER®

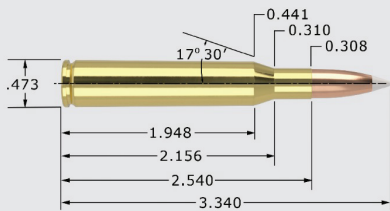

270 Win - 140 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	140gr. Spitzer	3.320"	0.460	0.261
Ballistic Tip®	BT	140gr. Spitzer	3.320"	0.456	0.261
Partition®	PT	140gr. Spitzer	3.320"	0.432	0.261

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	63.7 Gr. WATER	BARREL Length/Make	24" Shilen
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL15	47.0 * MAX.	2832	77%
	45.0	2727	74%
	43.0	2622	70%
H414	51.5 MAX.	2838	84%
	49.5	2693	81%
	47.5 *	2548	78%
IMR 4350	52.5 MAX.	2858	88%
	50.5	2723	85%
	48.5 *	2588	81%
IMR 4831 Most Accurate Powder Tested	53.5 MAX.	2910	90%
	51.5	2790	86%
	49.5 *	2670	83%
Hunter	56.5 MAX.	2975	91%
	54.5	2880	88%
	52.5 *	2786	85%
IMR 7828	57.5 MAX.	2977	96%
	55.5	2870	93%
	53.5 *	2763	89%
H4831SC	58.0 * MAX.	2999	95%
	56.0	2886	92%
	54.0	2773	88%
RL19	55.0 MAX.	3003	94%
	53.0	2891	90%
	51.0 *	2779	87%
W760	53.0 * MAX.	3020	87%
	51.0	2928	84%
	49.0	2837	81%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load