


Cartridge

270 Win - 150 grain

Version 9.0

NOSLER®

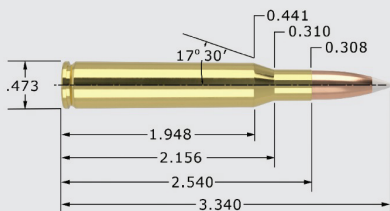

270 Win - 150 grain

270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 150gr. Spitzer	3.320"	0.500	0.279
AccuBond® Long Range	ABLR 150gr. Spitzer	3.340"	0.591	0.279
Ballistic Tip®	BT 150gr. Spitzer	3.320"	0.496	0.279
CT® Ballistic Silvertip®	BST 150gr. Spitzer	3.320"	0.496	0.279
Partition®	PT 150gr. Spitzer	3.320"	0.465	0.279

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	62.8 Gr. WATER	BARREL Length/Make	24" Shilen
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4350	52.0 * MAX. 2782		88%
Most Accurate	50.0 2657		84%
Powder Tested	48.0 2532		81%
W760	50.0 MAX. 2810		83%
	48.0 2740		80%
	46.0 * 2670		77%
IMR 4320	45.0 * MAX. 2818		78%
	43.0 2723		74%
	41.0 2628		71%
N165	54.0 MAX. 2842		96%
	52.0 2752		92%
	50.0 * 2662		88%
IMR 7828	57.5 MAX. 2862		97%
	55.5 2737		94%
	53.5 * 2612		91%
IMR 4350	53.0 * MAX. 2867		90%
	51.0 2762		87%
	49.0 2657		83%
RL19	55.0 MAX. 2892		95%
	53.0 2777		92%
	51.0 * 2662		88%
RL22	56.5 MAX. 2902		98%
	54.5 2787		94%
	52.5 * 2672		91%
H4831	55.0 MAX. 2905		91%
	53.0 2817		88%
	51.0 * 2728		85%
MAGPRO	61.5 MAX. 2918		** 101%
	59.5 * 2829		98%
	57.5 2740		94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load