


Cartridge

28 Nosler - 140 grain

Version 9.0

NOSLER®

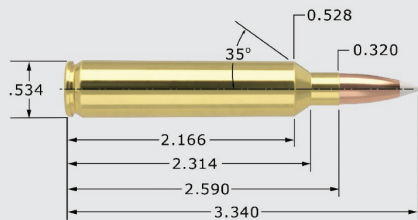

28 Nosler - 140 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	140gr. Spitzer	3.340"	0.485	0.248
Ballistic Tip®	BT	140gr. Spitzer	3.340"	0.485	0.248
CT® Ballistic Silvertip®	BST	140gr. Spitzer	3.340"	0.485	0.248
Expansion Tip®	ET	140gr. Spitzer	3.300"	0.489	0.248
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	140gr. Spitzer	3.340"	0.434	0.248

CASE TYPE:	Nosler		PRIMER TYPE	WLRM
CASE HOLDS:	94.5	Gr. WATER	BARREL Length/Make	26" Pac-Nor
			BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 7977	85.0	MAX.	3437	97%
	83.0	*	3331	94%
	81.0		3226	92%
H1000	86.0	MAX.	3444	96%
	84.0	*	3367	94%
	82.0		3291	92%
Magnum	88.0	* MAX.	3445	95%
	86.0		3381	92%
	84.0		3316	90%
US869	98.0	MAX.	3461	** 106%
	96.0	*	3384	** 104%
	94.0		3307	** 102%
IMR 7828 SSC	81.0	MAX.	3472	88%
	79.0	*	3351	86%
	77.0		3230	84%
RL25	86.0	* MAX.	3492	99%
	84.0		3379	97%
	82.0		3266	94%
RL26	84.0	MAX.	3493	91%
	82.0	*	3418	89%
	80.0		3343	86%
Norma 217	89.0	MAX.	3510	** 106%
	87.0	*	3380	** 103%
	85.0		3249	** 101%
Retumbo	88.0	MAX.	3519	** 100%
	86.0	*	3402	98%
	84.0		3285	96%
RL33	97.0	MAX.	3551	** 105%
	95.0	*	3495	** 103%
	93.0		3439	** 100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load