


Cartridge

28 Nosler - 150 grain

Version 9.0

NOSLER®

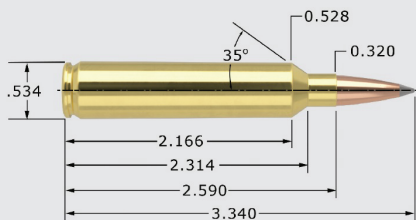

28 Nosler - 150 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	3.340"	0.493	0.266
AccuBond® Long Range	ABLR	150gr. Spitzer	3.340"	0.546	0.266
Ballistic Tip®	BT	150gr. Spitzer	3.340"	0.493	0.266
CT® Ballistic Silvertip®	BST	150gr. Spitzer	3.340"	0.493	0.266
Expansion Tip®	ET	150gr. Spitzer	3.300"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	150gr. Spitzer	3.340"	0.456	0.266

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	93.8 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 7828 SSC	78.0 * MAX.	3330	86%
	76.0	3278	84%
	74.0	3227	81%
Magnum	86.0 MAX.	3332	93%
	84.0 *	3270	91%
	82.0	3208	89%
H1000	84.0 * MAX.	3350	95%
	82.0	3260	93%
	80.0	3170	90%
IMR 7977	83.0 * MAX.	3352	95%
	81.0	3237	93%
	79.0	3122	91%
RL26	82.0 MAX.	3385	89%
	80.0 *	3289	87%
	78.0	3193	85%
Retumbo	86.0 MAX.	3392	99%
	84.0 *	3288	96%
	82.0	3184	94%
US869	95.0 * MAX.	3396	** 104%
	93.0	3326	** 102%
	91.0	3256	100%
RL25	84.0 MAX.	3410	97%
	82.0 *	3354	95%
	80.0	3298	93%
Norma 217	88.0 MAX.	3417	** 105%
	86.0 *	3325	** 103%
	84.0	3233	** 101%
RL33	94.0 MAX.	3426	** 102%
Most Accurate	92.0	3373	100%
Powder Tested	90.0 *	3321	98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load