


# Cartridge

## 28 Nosler - 160 grain

Version 9.0

# NOSLER®

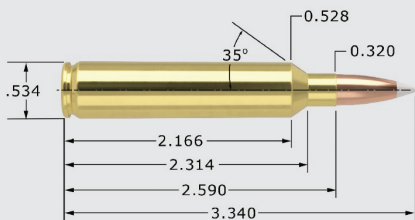

## 28 Nosler - 160 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	160gr. Spitzer	3.340"	0.531	0.283
Partition®	<b>PT</b>	160gr. Spitzer	3.340"	0.475	0.283

CASE TYPE:	Nosler		PRIMER TYPE	WLRM	
CASE HOLDS:	92.5	Gr. WATER	BARREL Length/Make	26" Pac-Nor	
			BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H50BMG</b>	94.0 MAX. 3201		** 105%
	92.0 * 3135		** 103%
	90.0 3069		** 101%
<b>IMR 7977</b>	81.0 * MAX. 3229		94%
	79.0 3133		92%
	77.0 3037		90%
<b>RL26</b>	79.0 MAX. 3232		87%
	77.0 * 3114		85%
	75.0 2996		83%
<b>H1000</b>	81.0 * MAX. 3235		93%
	79.0 3150		90%
	77.0 3065		88%
<b>RL25</b>	80.0 * MAX. 3269		94%
	78.0 3195		92%
	76.0 3121		89%
<b>Retumbo</b>	84.0 * MAX. 3275		98%
	82.0 3187		95%
	80.0 3099		93%
<b>US869</b>	93.0 MAX. 3285		** 103%
	91.0 * 3212		** 101%
	89.0 3139		99%
<b>Norma 217</b>	85.0 * MAX. 3290		** 103%
	Most Accurate 83.0 3191		** 101%
	Powder Tested 81.0 3092		98%
<b>RL33</b>	90.0 * MAX. 3293		99%
	88.0 3210		97%
	86.0 3127		95%
<b>Magnum</b>	85.0 * MAX. 3293		93%
	83.0 3246		91%
	81.0 3199		89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested

\*\* = Compressed load