


Cartridge

28 Nosler - 168 grain

Version 9.0

NOSLER®

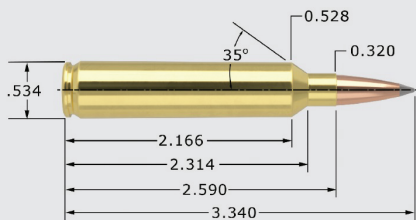

28 Nosler - 168 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond® Long Range	ABLR	168gr. Spitzer	3.340"	0.616	0.298	
Custom Competition®	CC	168gr. HPBT	3.340"	0.520	0.298	
CASE TYPE:	Nosler	PRIMER TYPE	WLRM			
CASE HOLDS:	91.0 Gr. WATER	BARREL Length/Make	26" Pac-Nor			
		BARREL Twist	1-9"			
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
H50BMG	92.0 * MAX.	3131	** 105%			
		3100	** 102%			
		3069	100%			
RL25	79.0 * MAX.	3160	94%			
		3086	92%			
		3011	90%			
IMR 7977	80.0 MAX.	3164	95%			
	78.0 *	3078	92%			
		2992	90%			
RL26	78.0 * MAX.	3178	87%			
		3082	85%			
		2986	83%			
H1000	80.0 MAX.	3185	93%			
	78.0 *	3108	91%			
		3031	88%			
Norma 217	84.0 MAX.	3191	** 104%			
	82.0 *	3084	** 101%			
		2977	99%			
US869	93.0 MAX.	3228	** 105%			
	Most Accurate	91.0 *	3135	** 103%		
	Powder Tested	89.0	3042	100%		
Returnbo	83.0 MAX.	3228	98%			
	81.0 *	3140	96%			
		3052	93%			
RL33	89.0 * MAX.	3239	100%			
		3137	98%			
		3036	95%			
RL50	92.0 * MAX.	3252	** 106%			
		3188	** 104%			
		3125	** 102%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load