


Cartridge

28 Nosler - 175 grain

Version 9.0

NOSLER[®]

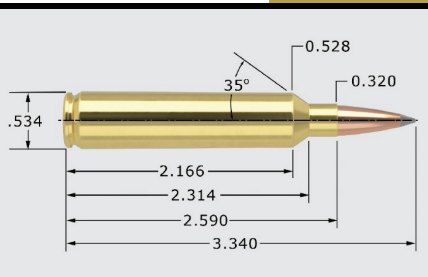

28 Nosler - 175 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond [®] Long Range	ABLR	175gr. Spitzer	3.340"	0.648	0.310
Partition [®]	PT	175gr. Spitzer	3.340"	0.519	0.310
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	90.0 Gr. WATER	BARREL Length/Make	26" Pac-Nor		
		BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 7828 SSC	73.0 MAX.	3036	84%		
	71.0 *	2956	81%		
	69.0	2875	79%		
Norma 217	80.0 * MAX.	3064	100%		
	78.0	2988	97%		
	76.0	2912	95%		
H1000 Most Accurate Powder Tested	79.0 MAX.	3103	93%		
	77.0 *	3002	91%		
	75.0	2900	88%		
IMR 7977	79.0 * MAX.	3125	94%		
	77.0	3028	92%		
	75.0	2931	90%		
RL25	78.0 * MAX.	3135	94%		
	76.0	3048	92%		
	74.0	2961	89%		
Returnbo	82.0 MAX.	3167	98%		
	80.0 *	3076	96%		
	78.0	2986	93%		
US869	92.0 * MAX.	3191	**	105%	
	90.0	3103	**	103%	
	88.0	3015	**	100%	
RL33	88.0 * MAX.	3211	100%		
	86.0	3093	98%		
	84.0	2975	95%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load