


# Cartridge

## 28 Nosler - 185 grain

Version 9.0

# NOSLER®

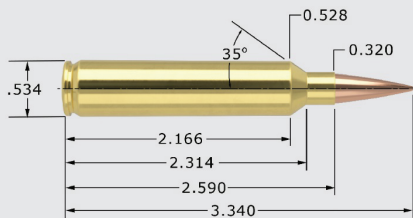

## 28 Nosler - 185 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.	
Reduced Drag Factor™		RDF	185gr. HPBT	3.340"	0.719	0.328
CASE TYPE:	Nosler		PRIMER TYPE	WLRM		
CASE HOLDS:	88.7	Gr. WATER	BARREL Length/Make	26" Pac-Nor		
			BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
<b>IMR 7977</b>	73.5 * MAX.	2966	89%			
	71.5	2888	87%			
	69.5	2810	84%			
<b>IMR 8133</b>	78.5 MAX.	3004	98%			
	76.5 *	2908	95%			
	74.5	2812	93%			
<b>H1000</b>	75.0 * MAX.	3004	89%			
	73.0	2948	87%			
	71.0	2892	85%			
<b>RL26</b>	74.0 MAX.	3039	85%			
	72.0	2957	83%			
	70.0 *	2874	81%			
<b>Returnbo</b> Most Accurate Powder Tested	78.0 * MAX.	3049	95%			
	76.0	2974	92%			
	74.0	2899	90%			
<b>RL25</b>	78.0 * MAX.	3065	96%			
	76.0	2984	93%			
	74.0	2902	91%			
<b>Norma 217</b>	78.5 MAX.	3067	99%			
	76.5	2981	97%			
	74.5 *	2895	94%			
<b>RL33</b>	85.0 * MAX.	3097	98%			
	83.0	3013	95%			
	81.0	2929	93%			
<b>LRT</b>	89.0 MAX.	3120	100%			
	87.0 *	3051	97%			
	85.0	2981	95%			
<b>US869</b>	89.0 MAX.	3152	**	103%		
	87.0 *	3065	**	101%		
	85.0	2977		98%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load