


# Cartridge

## 280 Ack Imp - 120 grain

Version 9.0

# NOSLER®

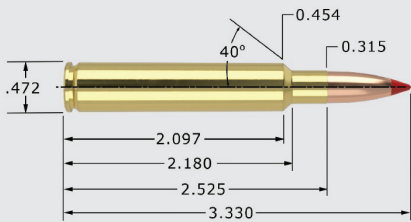

## 280 Ack Imp - 120 grain

## 7mm (.284")

<b>MAXIMUM SAAMI O.A.C.L.</b>	<b>3.330"</b>	<b>TESTED O.A.C.L.</b>	<b>B.C.</b>	<b>S.D.</b>
Ballistic Tip®	<b>BT</b>	120gr. Spitzer	3.330"	0.417 0.213

<b>CASE TYPE:</b>	Nosler	<b>PRIMER TYPE</b>	Fed 210
<b>CASE HOLDS:</b>	68.0 Gr. WATER	<b>BARREL Length/Make</b>	26" Wiseman
		<b>BARREL Twist</b>	1-9"

<b>POWDER TYPE</b>	<b>POWDER CHG. GRS.</b>	<b>MUZZLE VEL. F.P.S.</b>	<b>LOAD DENSITY (VOLUME)</b>
<b>H4831SC</b>	65.0 MAX.	3331	100%
	63.0	3227	97%
	61.0 *	3124	93%
<b>W760</b>	59.5 MAX.	3347	92%
	57.5	3245	89%
	55.5 *	3143	85%
<b>RL19</b>	63.0 MAX.	3365	** 101%
	61.0	3253	98%
	59.0 *	3140	94%
<b>IMR 4350</b>	60.5 MAX.	3366	95%
	58.5	3250	92%
	56.5 *	3135	89%
<b>N160</b>	63.0 MAX.	3376	** 103%
	61.0	3268	100%
	59.0 *	3160	96%
<b>H414</b>	60.0 MAX.	3396	92%
	58.0	3294	89%
	56.0 *	3192	86%
<b>Norma 204</b>	62.5 * MAX.	3414	** 102%
	60.5	3291	99%
	58.5	3169	96%
<b>AA 2700</b>	61.0 MAX.	3425	93%
	59.0	3323	90%
	57.0 *	3222	87%
<b>Hybrid 100V</b>	60.5 * MAX.	3460	92%
	58.5	3350	89%
	56.5	3240	86%
<b>RL17</b>	61.0 * MAX.	3503	93%
Most Accurate	59.0	3378	90%
Powder Tested	57.0	3252	87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load